

ULUDAĞ PANO KLİMA SİSTEMLERİ

Pano Tipi Klima/Air Conditioners For Cabinets

www.uludagklima.com



Tecnic Data	Svk-500	Svk-1000	Svk-2000	Svk-3000
Cooling capacity L35 L35	450 W	1000 W	1700 W	2700 W
Type of refrigerant	R 134a	R 134a	R 134a	R 134a
Amount of refrigerant	290 gr	400 gr	510 gr	610 gr
Thermostat setting	35 °C	35 °C	35 °C	35 °C
Hysteresis	4 K	4 K	4 K	4 K
External circuit	330 m3/h	575 m3/h	1175 m3/h	1400 m3/h
Internal circuit	330 m3/h	575 m3/h	875 m3/h	875 m3/h
Rated frequency	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
Standard power supply	198 V...252 V	198 V...252 V	198 V...252 V	198 V...252 V
Power absorbed L35 L35	312 W	690 W	890 W	1200 W
Running current	1.6 A	3.2 A	4.2 A	6.5 A
Starting current	5.2 A	16.2A	17.2A	21.2A
Weight	19 kg	35 kg	40 kg	45 kg
Height x Width x Depth mm	535*320*212	720*350*215	850*400*220	950*400*240
Corrosion protection (cover)	Stainless – Paslanmaz Çelik			
Orientation	Wall Mount	Wall Mount	Wall Mount	Wall Mount
System of protection	IP 54	IP 54	IP 54	IP 54
Ambient air temperature	+15 °C 55 °C	+15 °C 55 °C	+15 °C 55 °C	+15 °C 55 °C
Compressor	Danfoss			
Fans	EbmPapst-ZiehlAbegg			

Uludağ Pano Klima Sistemleri

Nosab, Demirciler Sitesi D Blok no:2 Nilüfer / BURSA

Tel: + 90 224 243 70 71 Fax: + 90 224 243 88 96


www.uludagklima.com

info@uludagklima.com

ULUDAĞ PANO KLİMA SİSTEMLERİ

Pano Tipi Klima/Air Conditioners For Cabinets

www.uludagklima.com

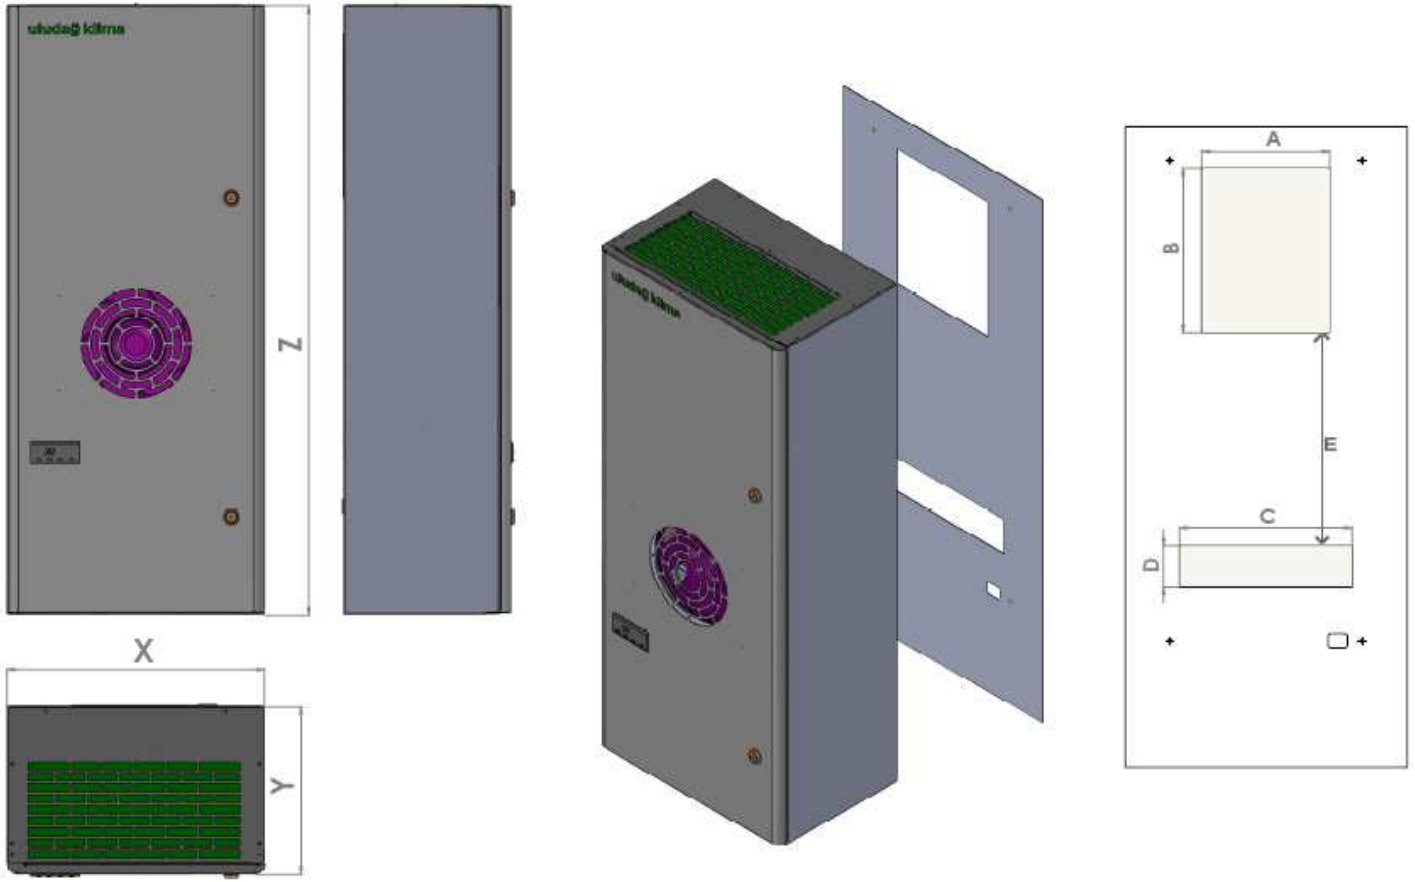

DIMENSIONS

(mm)	X	Y	Z	A	B	C	D	E
<i>Svk 500</i>	320	212	535	190	164	220	50	113
<i>Svk 1000</i>	350	215	700	183	241	200	60	162
<i>Svk 2000</i>	400	220	850	204	264	294	77	209
<i>Svk 3000</i>	400	240	950	204	264	294	77	357

Uludağ Pano Klima Sistemleri

Nosab, Demirciler Sitesi D Blok no:2 Nilüfer / BURSA

Tel: + 90 224 243 70 71 Fax: + 90 224 243 88 96

www.uludagklima.com

info@uludagklima.com