


# SVK 700

## ENCLOSURE COOLER

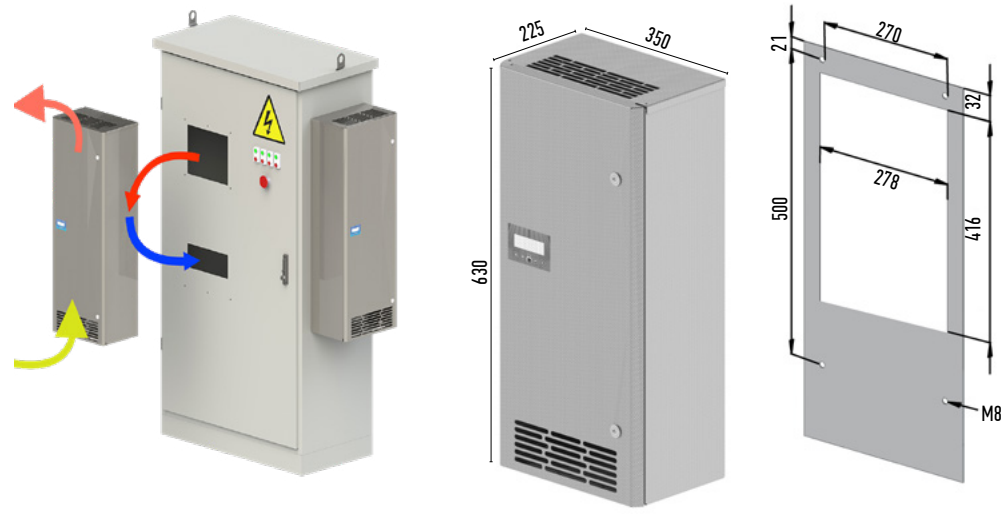

### TECHNICAL DETAILS

### SVK 700

Cooling Capacity (L35 / L35)	700 W
Type Of Refrigerant	R134A   <b>R513A</b>
Amount Of Refrigerant	340 g   <b>305 gr</b>
Adjustability Range	15 °C...35 °C
Hysteresis	4 °C
External Circuit	540 m <sup>3</sup> /h
Internal Circuit	540 m <sup>3</sup> /h
Rated Frequency	50/60 Hz
Input Voltage	230 V
Power Absorbed L35 L35	530 W
Current  Cooling ON	2.4 A
Starting / High-Current (RLA / LRA)	3.4 A / 13.5 A
Weight	26 kg
Height x Width x Depth mm	630 x 350 x 225
Corrosion Protection (cover)	Stainless or Painted Steel
Orientation	Wall Mount
System of Protection	IP 54
Ambient Air Temperature	-20 °C ... +55 °C
Compressor	Secop
Fans	EbmPapst
Communication Options	EtherNet/IP, ModBus TCP or RTU
Mobile Control	GooglePlay - AppStore




## 700 Watt Cooling Capacity

- **Easy Installation**, Wall Mount / Door Type
- **Smart System**, Digital Smart Controller
- **Steel Case**, Stainless Steel or Painted
- **Easy Maintenance**, Openable Cover
- **A Class Equipment**, High Quality parts



# PRODUCT PARTS

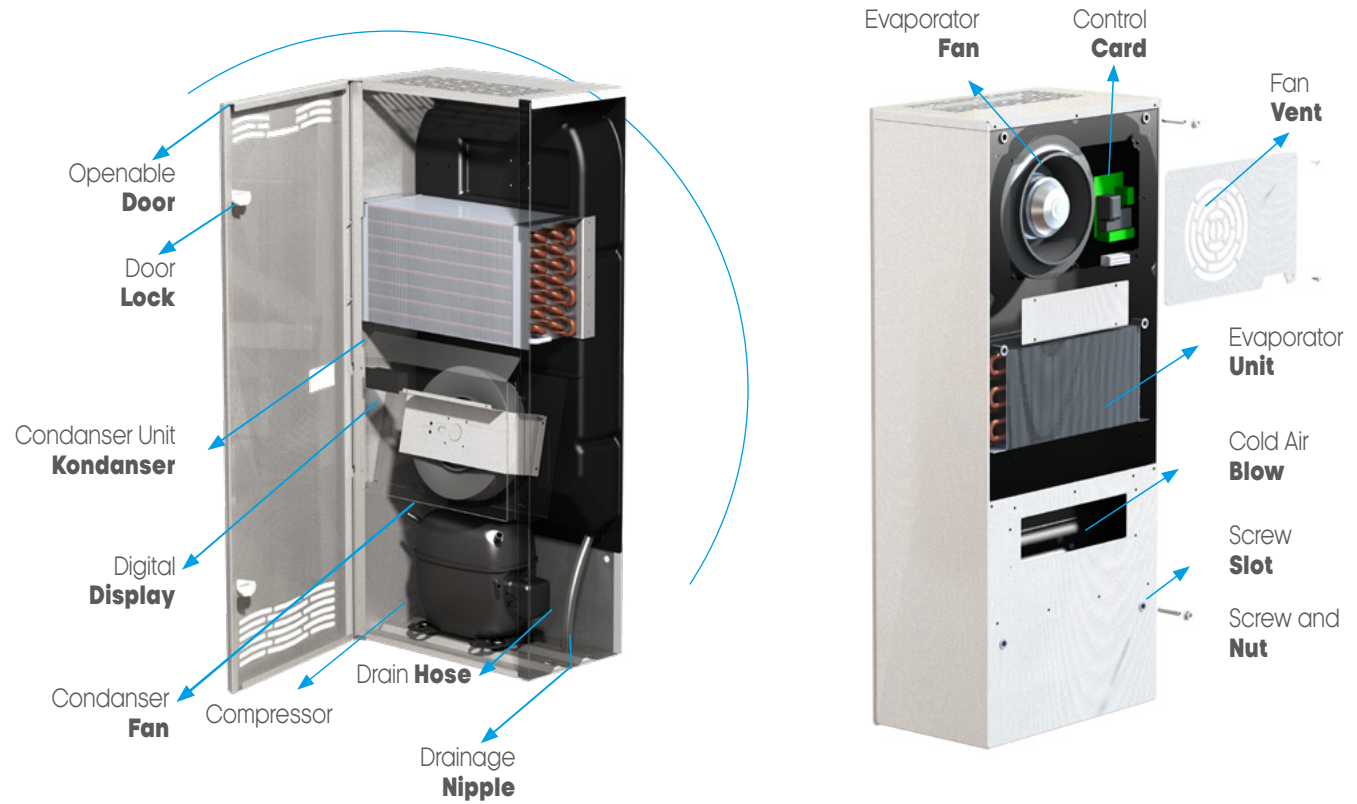

# PRODUCT DESCRIPTION


- 1- Openable cover, Easy Maintenance
- 2- Smart digital display and Smart electronic control
- 3- Remote control with Ethernet and RS485 Communication
- 4- Door switch connection
- 5- Fault warning system/dry contact; faults can be read on PLC or 220 V output
- 6- Three-sensor protection; Advance information feature for maintenance
- 7- Steel out body, modern design. Stainless or painted (optional)

# ELECTRONIC CONTROL



ETHERNET

## DISPLAY

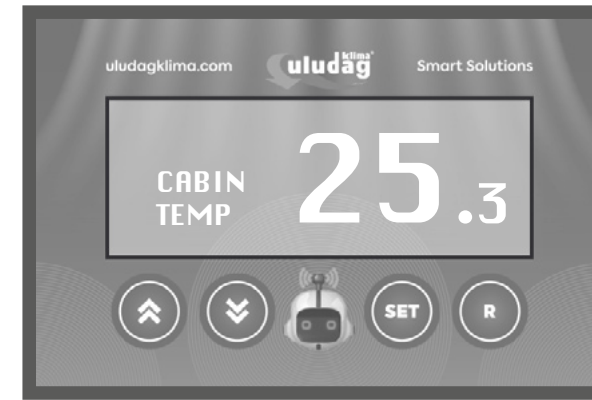

## CONTROL BOARDS



# INSTALLATION


## 01 TEMPLETE



## 02 CUTTING



## 03 FIXING



## 04 ENERGY

